

2.

LibreNMS , SNMP , []→ [],
host name server , community , , putty , 3

概觀裝置服務連接埠健康情況警報

admin

全域搜尋

Add Device

Devices will be checked for Ping/SNMP reachability before being probed.

Hostname or IP

127.0.0.1

SNMP

ON

SNMP Version

v2c

port

udp

Port Association Mode

ifIndex

SNMPv1/2c Configuration

Community

Community

Force add (No ICMP or SNMP checks performed)

OFF

Add Device

•
→ →server server , server






Lists: Basic | **Detail** Graphs: Bits | CPU | Load | Memory | Uptime | Storage | Disk I/O | Poller | Ping | Temperature

Agent Remove Search | Remove Header

↻ 50 ▾ ⌵ ▾

Search All ▾ All OS ▾ All Versions ▾ All Platforms ▾ All Featuresets ▾ All Locations ▾ Server× ▾ Search

Update URL Reset


S.	Id	M.	Vendor	Device	Metrics	Platform	Operating System	Up/Down Time	Location	Actions
	4			crm.sopdom.com odoo.ep	 4	Generic x86 64-bit	Linux 5.8.0-41-generic	6d 11h 22m 51s	odoo.ep	<div></div> <div>>_ </div>
	2			localhost go.sopdom.com	 299	Generic x86 64-bit	Linux 5.8.0-41-generic	7d 17h 42m 18s	Epower DOM	<div></div> <div>>_ </div>
	3			mail.sopdom.com	 4	Generic x86 64-bit	Linux 5.8.0-41-generic	6d 11h 20m 7s	mail.sopdom.com	<div></div> <div>>_ </div>
	5			www.sopdom.com	 4	Generic x86 64-bit	Linux 5.8.0-41-generic	6d 11h 24m 3s	www.sopdom.com	<div></div> <div>>_ </div>

◀ ◻ ◻ ◻ ◻ ▶


« < 1 > »

Showing 1 to 4 of 4 entries

, , ,cpu

**localhost**
Epower DOM

Storage Usage



Memory Usage



Processor Usage



概觀



Graphs



健康情況



連接埠



設備



Logs



警報



Alert Stats




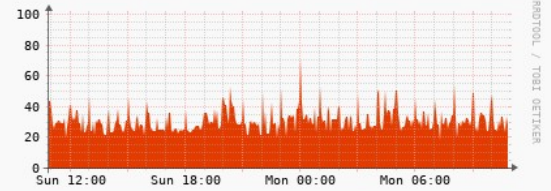
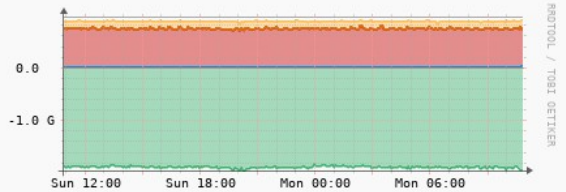
Latency



附註

**Linux go.sopdom.com 5.8.0-41-generic #46~20.04.1-Ubuntu SMP Mon Jan 18 17:52:23 UTC 2021 x86_64**

System Name	go.sopdom.com
Resolved IP	127.0.0.1
Hardware	Generic x86 64-bit
Operating System	Linux 5.8.0-41-generic
Object ID	.1.3.6.1.4.1.8072.3.2.10
Contact	epower@dom
Device Added	29 days 23 hours 37 minutes 39 seconds ago
Last Discovered	4 hours 18 minutes 40 seconds ago
Uptime	7 days 17 hours 42 minutes 18 seconds
Location	Epower DOM
Lat / Lng	N/A

[View](#)**Overall Traffic****Processors**Intel Core Processor x1
(Skylake, IBRS) 28%**Memory**

server,




Basic | **Details** | ARP Table | FDB Table | Graphs: Bits (Mini) | Unicast Packets (Mini) | Non-Unicast Packets (Mini) | Errors (Mini)

Port	Port Group	Traffic	Speed	Media	Mac Address
lo lo 127.0.0.1/8	Default	 ← 19.44 Kbps → 19.44 Kbps ← 20 pps → 20 pps	10 Mbps	Loopback -	- MTU 65536
eth0 Red Hat, Inc. Device 0001 45.76.100.169/23 2001:19f0:7001:256d:4e64:8a73:420a:8fab/64 2001:19f0:7001:256d:361e:c28:6a:33d4/64 2001:19f0:7001:256d:d0ef:14a8:33e1:fef6/64 2001:19f0:7001:256d:8040:a21a:9db4:361b/64 2001:19f0:7001:256d:84c0:af43:38c5:77b7/64 2001:19f0:7001:256d:dad5:d676:f086:45b8/64 2001:19f0:7001:256d:b534:1826:d3ab:da0c/64 2001:19f0:7001:256d:1b55:fc52:b57:3fcd/64	Default	 ← 32.05 Kbps → 149.79 Kbps ← 12 pps → 67 pps	-	Ethernet -	56:00:03:95:75:7c MTU 1500 → eth0 on crm.sopdom.com v6
eth1	Default	 ← 920 bps		Ethernet	5a:00:03:95:75:7c



本地主機:: 端口 eth0 :: Upkts

上傳次數 ▾

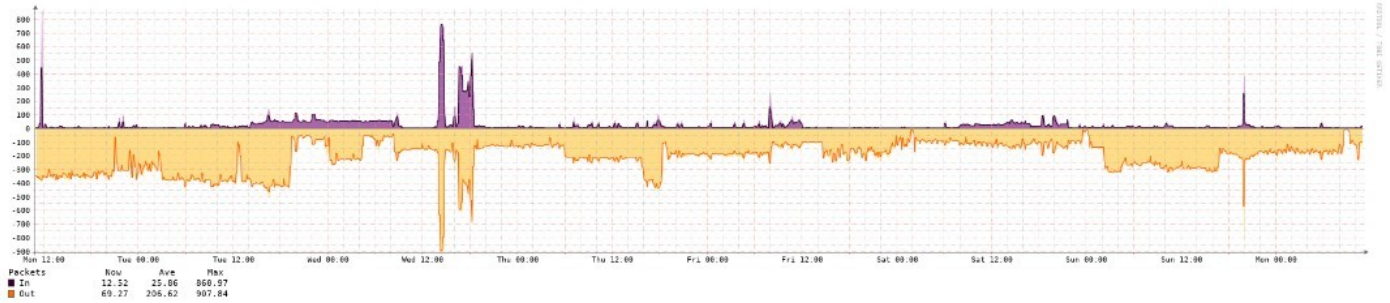


從 2021-10-11 10:55

到 2021-10-18 10:55

更新

隱藏圖例 顯示上一個 顯示 RRD 命令



Revision #16

Created 18 October 2021 01:12:35 by Epower

Updated 31 August 2022 02:59:53 by Epower